

**Certikin**  
*brings water to life*

## AquaSpeed Pump



**Certikin's Aquaspeed range of self priming pool & spa pumps provide quality, performance and value.**

## AQUASPEED PUMP

The Certikin Aquaspeed pumps is completely self priming and is available in a wide range of sizes from 0.5HP (0.25kW) to 3HP (2.2kW) in single and three phase. A 2 speed 1.5HP (1.1kW) single phase version is also available. Suitable for both pools and spas and can be used on salt-chlorinated pools - the perfect pump!

### Features



- Solid clear pump lid for easy inspection of the pump basket
- Secondary seal for added pump motor protection
- Comes complete with 2" quick connect unions for ease of installation
- 316 high grade mechanical seal
- Suitable for salt chlorinated pools
- Hydraulically efficient impellor and diffuser design for maximum hydraulic output whilst minimising turbulence
- Single piece fibreglass filled pump body to ensure maximum strength and durability
- UV stabilised and corrosion resistant pump body
- TUV approved
- Exclusive to Certikin

### Specifications

- Voltage - 50hz single phase 240V 2850rpm  
Three phase 240 / 415V 2850rpm
- Motor - IP55 totally enclosed fan cooled motor and fully CE approved. Class F insulation and fitted with thermal protection.  
316 grade stainless steel shaft.

Supplied with approximately 1.5 metres pre-wired cable (single phase only).

- Maximum water temperature +50°C
- Carton size - 68cm (L) x 29cm (W) x 35cm (H)
- Volume - 0.07m<sup>3</sup>

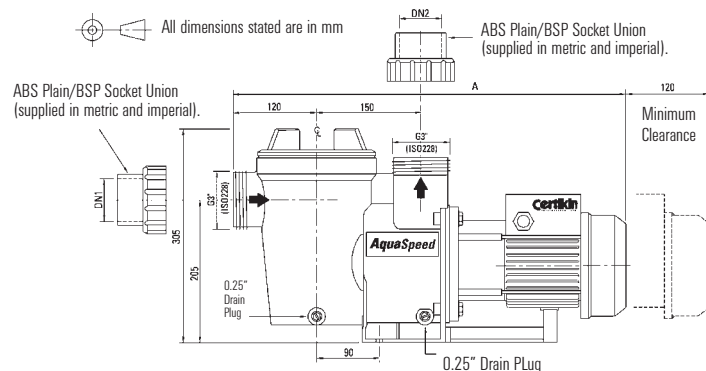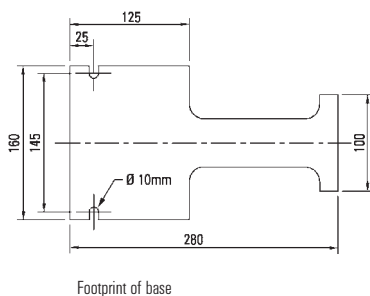

kW	HP	Suction & Delivery	Voltage	Head m <sup>3</sup> /hr								Single Phase (amp)		Three Phase (amp)		Weight kg	A		
				4	6	8	10	11	12	15	16	Start up	Running	Start up	Running				
0.37	0.5	1.5"	220	12	10	7.5	4.95							6.5	1.5	-	-	13	545
0.56	0.75	1.5"	220	14	12.5	11	9	7.5	6					7.9	3.2	1.5	1.1	14	545
0.75	1.0	1.5"	220	20	18	17	15	13.5	12.5	7	5			10.5	3.5	1.7	1.5	16	565
1.1	1.5	1.5"	220	24	22.5	20	18	17	15	9	7			11.0	4.0	1.9	1.7	17	565
1.5	2.0	2"	220			27	24.5	23	21	15	10			11.6	6.0	2.5	2.1	20.5	610
2.2	3.0	2"	220			32.5	28	25	25	15	10			14.1	7.5	3.0	2.5	20.5	610

If you require further technical information please do not hesitate to contact us

**Certikin**  
brings water to life



Certikin International Ltd  
www.certikin.co.uk



This literature is intended as a guide. The Company reserves the right to change the specifications without notice.