


Compliant with standard NF P 90-308 Tested by LNE







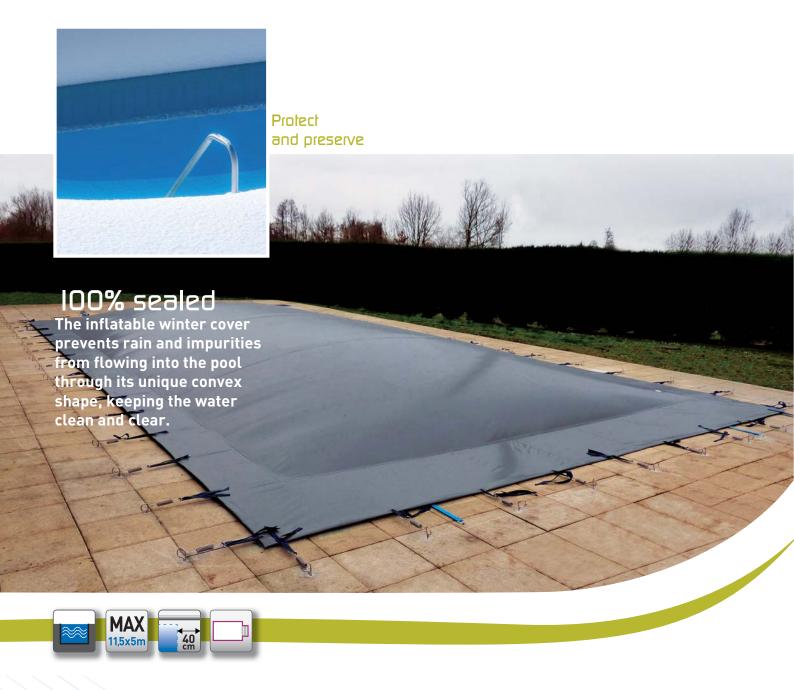

WALU AIR:

- · Water stays clear within the winter period
- Thanks to the convex-form of the cover, rainwater, pollution and impurities don't get into the pool
- The opaque sheet (double layers) slows down UV rays and avoids the development algae



Stainless steel strap and spring



Options



COLOURS



Sand







Anthracite grey

Inflation valve

The PVC reverse side colour Sand (except for grey and night) avoid bleaching over the coping.

Grey

* Available color while stocks last.

Moka



*according to our general warranty terms delivered with the cover.



Stainless steel P-Shaped PEG



PVC-protection for Dynamometer springs

Technical specifications

Manufacturing:

Entirely welded

Material:

New 2016: Opaque PVC sheet 650 g/m²

Average cover weight:

1 300 g/m²

Tensioning:

Stainless steel strap and spring

Fastening: Standard stainless steel

P-shaped pegs

Overlap: 2 x 40 cm

Options:

Fastening

Stainless steel pop-up anchors with bushing

- Inflation Electric inflator (220 V) with 5 m pipe
- **Handling** 2 straps* (pool length + 1,50 m)

*strongly recommended for pools over 8 x 4 m

Swimming pool safety cover designed to prevent access to the pool for children under 5 years of age.

Keep this document for future reference.

Warning:

This cover is no substitute for common sense and individual responsibility. It is not intended to dispense with the need for supervision of young children by their parents and/or responsible adults. which remains essential for their safety.

Distributed by:

CERTIKIN INTERNATIONAL

Premier Park, Premier Way, Off Castle Gate Oulton, Leeds, LS268ZA | United Kingdom Phone: +44 (0) 113 3934545 | Fax: +44 (0) 113 2059547

www.cerlikin.co.uk

As part of an ongoing continuous improvement process, WALTER reserves the right to alter its products - available on stock - without any prior notice. Photos and illustrations are not contractually binding. Printing errors excepted.