



Contents

4	About Us
6	NATURAL STONE
8	Fossil Pearl Tumbled Grip Limestone
10	Fossil Pearl Satin Limestone
12	Barton Ash Tumbled Limestone
14	Downton Antique Limestone
16	Broughton Limestone
17	Fossil Pearl Etched Limestone
18	Monxton Flamed Granite
19	Travertine Tumbled & Unfilled
22	Danebury Honed Sandstone
24	Leckford Sawn Sandstone
26	Georgian Antique Sandstone
28	Hawksworth Antique Sandstone
29	York English Sandstone
30	Cotswold Mint Riven Sandstone
32	Raj Riven Sandstone
33	Crema Europa Sandblasted Limestone
34	Fossil Pearl Honed & Tumbled Limestone
35	Findon Tumbled Marble Cabochon
36	BESPOKE
38	Grilles
40	Steps & Staircases
42	Site Template Service
44	TECHNICAL INFORMATION
44	Edge Profiles
44	Technical Coping Diagrams
45	Laying Patterns
46	Laying Guidelines
50	Cleaning & Maintenance
52	Fixing & Preparation



Fossil Pearl Tumbled Grip Limestone

CRANBOURNE STONE

Specialists in providing high quality stone products



Cranbourne Stone began with our Managing Director, Howard, who entered the swimming pool industry at 17 and soon recognised the need for higher-quality pool surrounds. With more than 35 years of experience and with the support of his wife Jo, whose expertise spans decades, Cranbourne Stone Ltd was founded.

Over the past 20 years, we've grown from producing precast concrete copings to offering bespoke cutting, profiling and supplying an extensive range of stone and porcelain sourced from over ten countries.



Now entering our second generation, Cranbourne Stone is being carried forward by our daughter Lonen, supported by our loyal, long-standing team who truly feel like one big family.

With fresh ideas and exciting ventures ahead, we're continually expanding our product offering — not only for swimming pool surrounds but for all types of landscaping and internal projects.

What started as a family venture continues to be driven by craftsmanship, innovation and a shared commitment to exceptional quality.



Natural Stone

Hand selected from the best, most consistent sources, Natural Stone allows you to truly appreciate its beauty. It's tonal variation and textures helps you to create a one of a kind, unique finish to every project.



LIMESTONE

Fossil Pearl Tumbled Grip

Fossil Pearl Tumbled Grip Limestone features warm ivory tones, subtle fossil detailing and softly weathered edges. Its textured, surface provides safe, slip resistant and elegant paving flooring and pool surrounds.



RECOMMENDED FOR

Internal
External

Internal Flooring
Paving
Pool Copings
Deck Level Grilles
Wall Capping
Wall Cladding
Step Treads
Stair Cases
Skirting Tiles
Setts

OPTION

Tiles

FORMAT

900 x 600 x 30mm
900 x 600 x 20mm
600 x Random Length x 30mm

Step Treads

900 x 475 x 40mm Bullnosed Edge
600 x 450 x 40mm Bullnosed Edge

Coping

600 x 300 x 40mm Bullnosed Edge

Setts

200 x 100 x 40mm
200 x 50 x 40mm
200 x 100 x 30mm

NOTES

Occasional pitting visible in stone. Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect visible calcite veins within this stone. 20mm Tiles can only be laid externally if on a solid concrete screed with a fall. Specific laying guidelines on page 49.

We recommend Mapei grout 132 / 188.



Scan for more information



LIMESTONE

Fossil Pearl Satin

Featuring soft ivory tones, warm undertones, subtle fossil detailing and a light sandblasted finish, creating a refined, slip-resistant surface ideal for luxurious pool surrounds and elegant indoor-outdoor spaces.



Bespoke Fleur de Lis


- RECOMMENDED FOR
- Internal & External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Deck Level Grilles
 - Wall Capping & Wall Cladding
 - Step Treads
 - Stair Cases
 - Skirting Tiles

OPTION	FORMAT
Tiles	900 x 600 x 30mm
	900 x 600 x 20mm
Step Treads	900 x 475 x 40mm Bullnosed Edge
	600 x 450 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge
	600 x 300 x 50mm Pencil Edge
	600 x 300 x 30/50mm Square Over-Lip
	600 x 600 x 30/50mm Square Over-Lip

NOTES

Occasional pitting visible in stone. Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect visible calcite veins within this stone. 20mm Tiles can only be laid externally if on a solid concrete screed. Specific laying guidelines on page 49.

We recommend Mapei grout 123 / 132.




Scan for more information



LIMESTONE

Barton Ash Tumbled

A Grey Tumbled Limestone which offers soft silver tones, gently weathered edges and subtle natural variation. Its timeless, slip-resistant finish creates a refined, characterful surface that complements both modern and traditional settings.

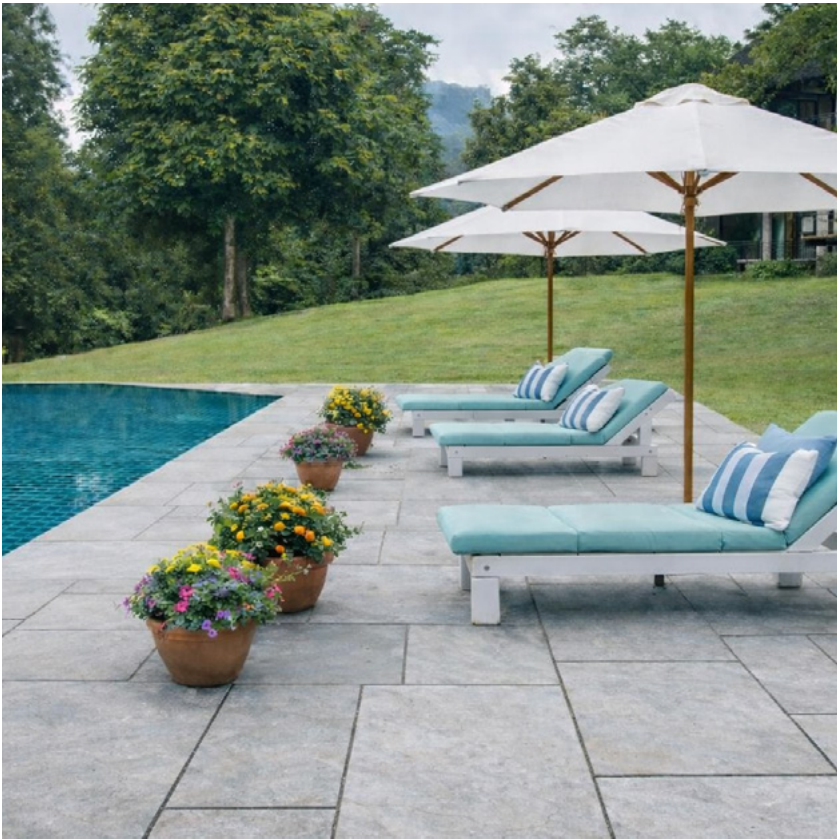

- RECOMMENDED FOR
- Internal
 - External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Setts

OPTION

Tiles

Step Treads

Coping

Setts

FORMAT

- 900 x 600 x 22mm
- 560 x Random Length x 22mm
- 600 x 450 x 40mm Bullnosed Edge
- 600 x 300 x 40mm Bullnosed Edge
- 200 x 100 x 40mm
- 200 x 50 x 40mm
- 200 x 50 x 22mm

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet.
We recommend Mapei grout 112.



Scan for more information



LIMESTONE

Downton Antique

Downton Antique Limestone features tumbled edges and a part-honed finish with oat, dove-grey, buff and olive tones, creating a rustic flagstone look suitable for both internal and external projects



RECOMMENDED FOR

Internal
External

Internal Flooring
Paving
Pool Copings
Wall Capping
Wall Cladding
Step Treads
Setts / Cobbles

OPTION

Tiles

Step Treads

Coping


Setts

FORMAT

900 x 600 x 25mm
560 x Random Length x 25mm
600 x 450 x 40mm Bullnosed Edge
600 x 300 x 40mm Bullnosed Edge
200 x 100 x 40mm
200 x 50 x 40mm
200 x 50 x 25mm

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Iron content can be visible within this product.
For jointing, we recommend either Mapei Grout 188/112, or a Sand & Cement Mix.



Scan for more information

LIMESTONE


Broughton

Grey sandblasted limestone featuring cool silver and charcoal tones, a softly textured slip-resistant surface, and refined contemporary character—ideal for sleek external pool surrounds and modern architectural landscapes.



- RECOMMENDED FOR
- Internal
 - External
 - Pool Coping
 - Paving
 - Steps
 - Deck Level Grilles
 - Wall Capping
 - Aquatechnic Pool Kits


OPTION	FORMAT	NOTES
Coping	600 x 350 x 30/50mm Square Over-Lip	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Compatible with Aquatechnic One-Piece Pools. We recommend Mapei grout 112.
Tiles	600 x 600 x 25mm	



LIMESTONE

Fossil Pearl Etched

Featuring ivory tones and subtle fossils, enhanced by an etched finish that lightens the surface, creating a bright, refined, slip-resistant look for elegant pool surrounds.

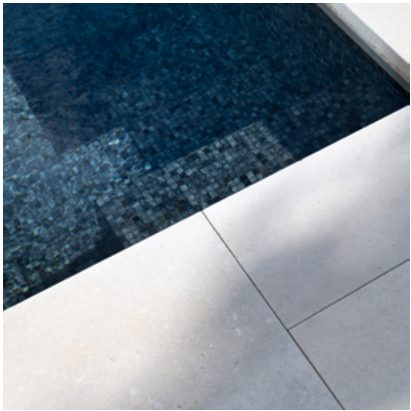

- RECOMMENDED FOR
- Internal
 - External
 - Pool Coping
 - Paving
 - Steps
 - Wall Capping
 - Aquatechnic Pool Kits

OPTION	FORMAT	NOTES
Coping	800 x 400 x 30/50mm	Occasional pitting visible in stone. Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect visible calcite veins within this stone. Recommended to pair Fossil Pearl Satin paving/Tiles with the Etched Copings. Compatible with Aquatechnic One-Piece Pools. We recommend Mapei grout 123.
Tiles	900 x 600 x 30mm.	



GRANITE

Monxton Flamed

Flamed granite in dark anthracite with subtle silver tones transforms to a deep black when wet. Its textured, slip-resistant surface offers a sleek, contemporary finish ideal for modern external spaces.



- RECOMMENDED FOR
- Internal
 - External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Deck Level Grilles
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Stair Cases
 - Skirting Tiles

OPTION	FORMAT	NOTES
Tiles	600 x 600 x 20mm	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Would suggest a colour enhancing sealer to darken the appearance of the stone. We recommend Mapei grout 114.
Step Treads	600 x 600 x 30mm Bullnosed Edge	
Coping	600 x 300 x 30mm Bullnosed Edge 600 x 350 x 30/50mm Square Over-Lip	
Setts	200 x 100 x 30mm	
	200 x 50 x 30mm	

Scan for more information

TRAVERTINE

Travertine Tumbled & Unfilled

Tumbled and unfilled Travertine features warm cream, beige and honey tones with natural pits and rustic texture. Its gently weathered edges create an aged, Mediterranean character suitable for both internal and external spaces.



- RECOMMENDED FOR
- Internal
 - External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Stair Cases
 - Skirting Tiles
 - Setts



OPTION	FORMAT	NOTES
Tiles	610 x 406 x 12mm 610 x 406 x 30mm	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect Pitts within this stone. We recommend filling Pitts with the grout to help with slip resistance and maintenance. We recommend Mapei grout 132.
Step Treads	610 x 406 x 30mm Bullnosed Edge	
Coping	610 x 305 x 30mm Bullnosed Edge 610 x 305 x 30/50mm Bullnosed Over-Lip	
Setts	200 x 100 x 30mm	

Scan for more information



Travertine Tumbled & Unfilled



SANDSTONE

Danebury Honed

Danebury Sawn & Honed Sandstone features clean mint and buff tones with slight colour variation, sawn edges and a smooth honed finish. Durable and elegant, it's ideal for external terraces, steps and pool surrounds.




RECOMMENDED FOR

- Internal
- External
- Internal Flooring
- Paving
- Pool Copings
- Deck Level Grilles
- Wall Capping
- Wall Cladding
- Step Treads
- Skirting Tiles
- Setts

OPTION	FORMAT
Tiles	900 x 600 x 22mm Heritage Mix Pack (16.98m ² coverage)
Step Treads	600 x 450 x 40mm Bullnosed Edge 900 x 450 x 40mm Bullnosed Edge 1200 x 350 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge 600 x 300 x 50mm Pencil Edge 600 x 600 x 50mm Pencil Edge 600 x 300 x 30/50mm Square Over-Lip 600 x 600 x 30/50mm Square Over-Lip
Setts	200 x 50 x 40mm 200 x 100 x 40mm 200 x 50 x 22mm

NOTES
Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Iron content within this stone and grey swirling is sometimes visible.
We recommend Mapei grout 103 / 123 or sand & cement mix.





SANDSTONE

Leckford Sawn

Leckford Sawn and lightly sandblasted Sandstone features soft cream and pale buff tones with subtle variation and crisp sawn edges, creating a clean, contemporary aesthetic ideal for elegant terraces, steps and pool surrounds.



RECOMMENDED FOR

Internal
External

Internal Flooring
Paving
Pool Copings
Wall Capping
Wall Cladding
Step Treads
Skirting Tiles
Setts

OPTION

Tiles
Step Treads
Coping
Setts

FORMAT

900 x 600 x 30mm
600 x 450 x 40mm Bullnosed Edge
600 x 300 x 40mm Bullnosed Edge
200 x 100 x 30mm
200 x 50 x 40mm

NOTES

Occasional pitting visible in stone. Please note natural stone varies in colour tones, textures and markings and are enhanced when wet.
We recommend Mapei grout 188.



Scan for more information



SANDSTONE

Georgian Antique

Riven and tumbled sandstone featuring soft greys with slight blue undertones, natural riven texture and weathered edges. Its rustic, timeless character makes it ideal for pool surrounds and traditional or contemporary outdoor spaces.



RECOMMENDED FOR

Internal
External


Internal Flooring
Paving
Pool Copings
Wall Capping
Wall Cladding
Step Treads
Setts / Cobbles

OPTION	FORMAT
Paving	900 x 600 x 22mm 600 Series Mix Pack (16.74m ² coverage)
Step Treads	600 x 450 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge
Setts	200 x 100 x 40mm 200 x 50 x 40mm 100 x 100 x 40mm 200 x 50 x 22mm

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Iron content within this stone is sometimes visible.

For jointing, we recommend a sand & cement mix.



Scan for more information

SANDSTONE

Hawksworth Antique

Featuring deep charcoal and smoky grey tones, a natural riven texture and weathered edges, this sandstone creates a rustic, traditional flagstone look. Ideal for characterful external and transitional spaces.




- RECOMMENDED FOR
- External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Setts

OPTION	FORMAT
Paving	900 x 600 x 22mm 600 Series Mix Pack (16.74m² coverage)
Step Treads	600 x 450 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge
Setts	200 x 100 x 40mm 200 x 50 x 40mm 200 x 50 x 22mm

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Iron content within this stone is sometimes visible.

For jointing, we recommend a sand & cement mix.



ENGLISH SANDSTONE

York

English York Stone offers timeless character with its warm buff, grey and honey tones. In sawn form it provides a crisp, contemporary finish, while the natural riven surface delivers traditional texture and rustic charm. Durable and versatile, it suits both heritage restoration and modern landscaping projects.



Sawn Bullnosed Coping


- RECOMMENDED FOR
- Internal
 - External
 - Internal Flooring
 - Paving
 - Pool Copings
 - Deck Level Grilles
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Stair Cases

OPTION	FORMAT
Riven Paving	Fixed Width x Random Length x 40-70mm
Sawn Paving	600 x Random Length x 50mm
Step Treads	600 x 450 x 50mm Bullnosed Edge (Sawn)
Coping	600 x 300 x 50mm Bullnosed Edge (Sawn)

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect a variation within thickness for the riven finish. Rainbow/swirls are sometimes visible within this stone.

For jointing, we recommend a sand & cement mix.





SANDSTONE

Cotswold Mint Riven

Cotswold Mint Riven Sandstone features warm cream, soft gold and pale honey tones with natural riven texture and subtle variation, creating a bright, rustic finish ideal for traditional gardens and pool surrounds.



Traditional Walling

- RECOMMENDED FOR**
- External**
- Paving
 - Pool Copings
 - Deck Level Grilles
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Setts
 - Traditional Walling

OPTION	FORMAT	NOTES
Paving	900 x 600 x 22mm 600 Series Mix Pack (16.74m² coverage)	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Iron content within this stone is sometimes visible. For jointing, we recommend a sand & cement mix.
Step Treads	600 x 450 x 40mm Bullnosed Edge	
Coping	600 x 300 x 40mm Bullnosed Edge	
Setts	200 x 100 x 40mm 200 x 50 x 40mm 200 x 50 x 22mm	
Traditional Walling	Pack includes the sizes of 200 x 100, 300 x 100, 365 x 100 x 75mm thick	



Scan for more information

SANDSTONE

Raj Riven

Raj Riven Sandstone features a blend of earthy greens, greys, browns and subtle plum tones, with a naturally split riven texture. Its rich tonal variation creates a warm, rustic finish ideal for traditional garden and poolside settings.




- RECOMMENDED FOR
- External
 - Paving
 - Pool Copings
 - Wall Capping
 - Wall Cladding
 - Step Treads
 - Setts
 - Traditional Walling

OPTION	FORMAT
Paving	900 x 600 x 22mm 600 Series Mix Pack (20.25m² coverage)
Step Treads	600 x 450 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge
Setts	200 x 100 x 40mm 200 x 50 x 40mm 200 x 50 x 22mm
Traditional Walling	Pack includes the sizes of 200 x 100, 300 x 100, 365 x 100 x 75mm thick

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet.

For jointing, we recommend a sand & cement mix.



LIMESTONE

Crema Europa
Sandblasted or Honed

This limestone features soft cream-ivory tones with fine, natural mineral speckling. Its sandblasted finish provides gentle texture and dependable slip resistance, creating a bright, refined surface ideal for internal pool and spa areas. Also available in Honed finish for internal use in non-wet room areas.




- RECOMMENDED FOR
- Internal
 - Internal Flooring
 - Pool Copings
 - Deck Level Grilles
 - Wall Cladding
 - Step Treads
 - Stair Cases
 - Skirting Tiles

OPTION	FORMAT
Tiles	900 x 600 x 20mm 600 x 600 x 20mm 600 x 400 x 20mm
Step Treads	600 x 450 x 40mm Bullnosed Edge
Coping	600 x 300 x 40mm Bullnosed Edge

NOTES

Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect visible calcite veins and graining within this stone. Can only be used internally.

We recommend Mapei grout 103 / 123.



LIMESTONE

Fossil Pearl Honed & Tumbled

Tumbled Fossil Pearl Limestone with a honed finish combines softly weathered edges with a smooth, refined surface. Its warm ivory and pale beige tones highlight natural fossil detailing, creating a tactile, elegant appearance suitable for internal use.



RECOMMENDED FOR
Internal
Internal Flooring
Wall Cladding
Step Treads
Stair Cases
Skirting Tiles

OPTION	FORMAT	NOTES
Tiles	900 x 600 x 20mm 600 x Random Length x 15mm 600 x 400 x 15mm	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet. Expect visible calcite veins within this stone. Can only be used internally and not in wet rooms. We recommend Mapei grout 123 / 132 / 188.



Scan for more information

CABOCHON

Findon Tumbled Marble

For a truly classic aesthetic, the Findon tile offers enduring elegance. Its historic octagonal design, paired with contrasting dark cabochon inserts and a softly tumbled edge, creates a refined yet characterful finish.



RECOMMENDED FOR
Internal
Internal Flooring


OPTION	FORMAT	NOTES
Tiles	406 x 406 x 10mm tile paired with 100 x 100 x 10mm Cabochon (6pcs of each size tile per pack)	Please note natural stone varies in colour tones, textures and markings and are enhanced when wet We recommend Mapei grout 123.




Scan for more information

Bespoke

We've invested heavily over the years in state-of-the-art machinery. What began with a single 5-axis bridge saw has grown into a fully equipped factory with two waterjets, three edge polishers, a porcelain dual cutter, a sanding booth and specialist hand-profiling equipment. We also operate our own recycling centre, complete with a stone crusher, tumbling machine and full water-recycling plant.

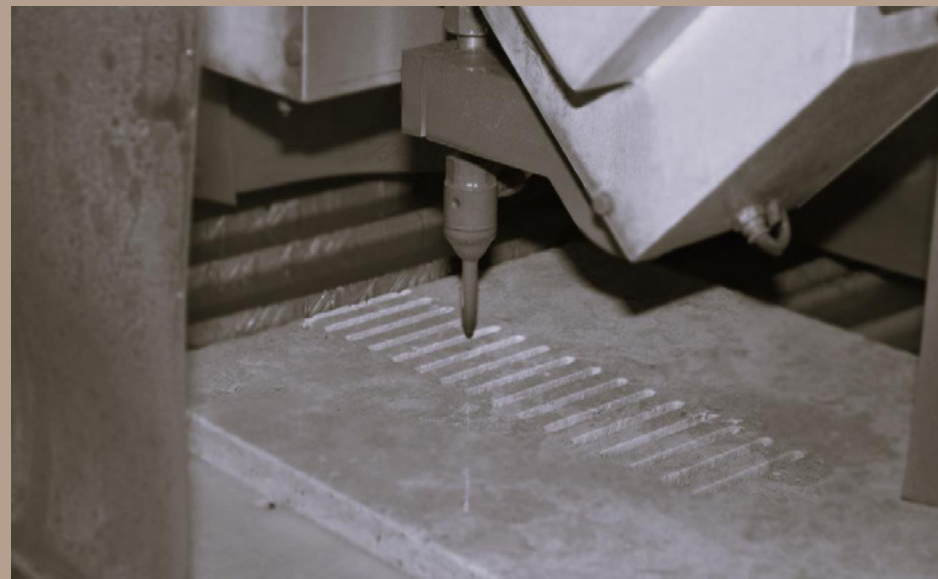

With this blend of advanced technology and expert craftsmanship, we can bring virtually any design to life – and often even more than clients imagine.

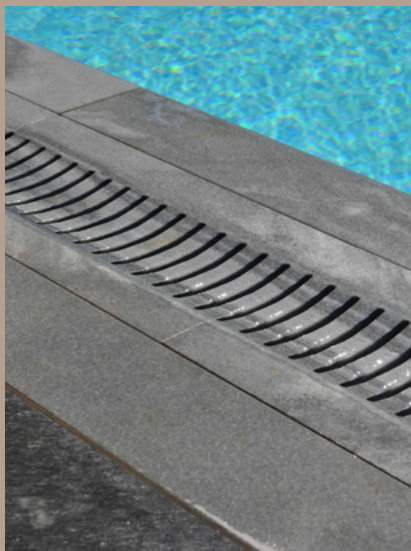

Grilles

All grilles are expertly manufactured to order in our in-house factory and are available in select natural stone options, delivering a bespoke finish.

LINEAR SLOT GRILLE



The Linear Slot is a sleek, contemporary three-piece pool grille with a minimalist aesthetic, featuring two continuous linear slots running the full length of the grille. Its refined design allows water to drain efficiently into a concealed drainage system, maintaining a clean and uncluttered finish.

CONTEMPORARY SLOTTED GRILLE



The Contemporary Slotted Grille is a precision-designed, three-piece system that provides a sleek and stylish finish to pool surrounds. Featuring a series of carefully engineered slots and fluted grooves, the design helps to control water flow and minimise wash onto the surrounding deck, enhancing both performance and appearance.

SLOTTED DISH GRILLE




Designed for high-use pools, the Slotted Dish grille features a subtly contoured dish formed along the grille to guide water efficiently into the slots. This highly functional grille module delivers increased water flow while providing a refined, luxurious finish to the pool surround.

ACO GRILLE



Upgrade outdoor drainage with a luxury natural stone linear grille designed to fit standard ACO channel systems. Precision waterjet-cut slots allow fast, reliable water flow while maintaining a clean, modern finish. A hidden stainless steel undersupport frame adds strength, stability, and long-term durability, ensuring the grille sits securely within the channel. Ideal for patios, terraces, walkways, and landscaped areas, it blends seamlessly with surrounding paving for a refined, cohesive look.

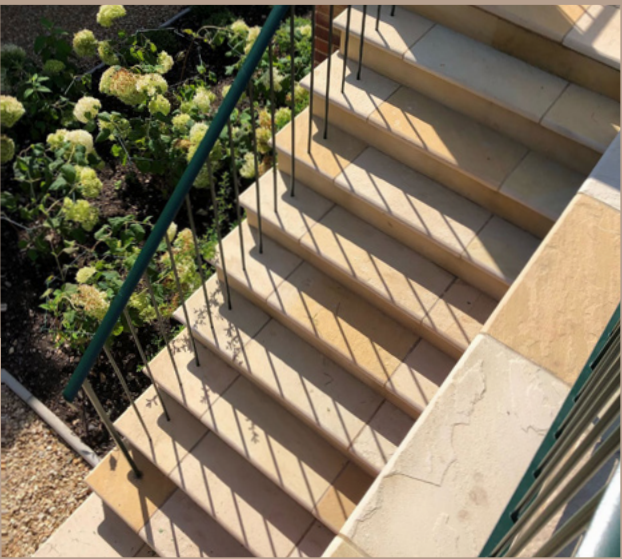

Site Template Service

Our Site Template Service is designed to remove guesswork from complex installations. Using our extensive building knowledge and the latest digital technology, we deliver components that fit perfectly — even in the most challenging environments.


We attend site with our advanced digital laser measuring equipment to capture precise measurements of freeform swimming pools, irregular walling, and other non-standard shapes. This technology allows us to accurately record complex curves, angles, and variations that traditional measuring methods simply can't achieve.

The captured data is then taken back to our office, where it is converted into a detailed CAD drawing. This drawing forms the exact cutting path for our state-of-the-art waterjet cutting machine, ensuring every piece is cut with exceptional accuracy to suit its specific application.



Before cutting begins, a full drawing is sent to you for approval, giving complete confidence that everything is correct. Once approved, each component is precision-cut, carefully numbered, and prepared for dispatch.

Your order is delivered with a detailed numbered layout plan, allowing every piece to fit together seamlessly — just like a puzzle — for faster installation, reduced waste, and a flawless finished result.

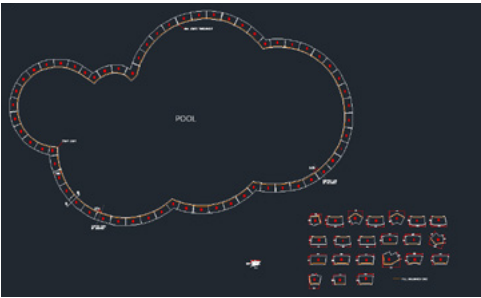

Edge Profiles

FULL BULLNOSE



PENCIL EDGE TOP AND BOTTOM



HALF BULLNOSE



ARIS EDGE TOP AND BOTTOM



DRIP GROOVE



LED GROOVE




OVER-LIP PENCIL PROFILE






OVER-LIP BULLNOSE PROFILE




OVER-LIP ARIS PROFILE




Technical Coping Diagrams

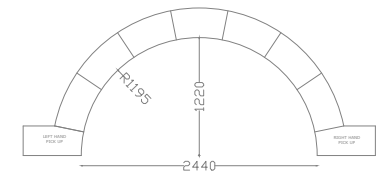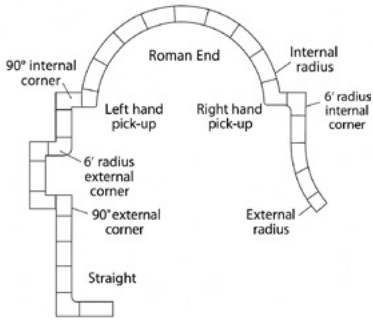

4ft Roman End Bay
(Country Leisure 10ft Roman End Bay)

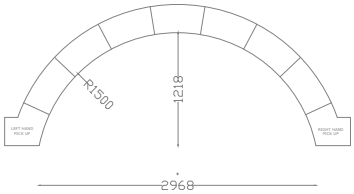

5ft Low Profile Roman End Bay
(Country Leisure 12ft Roan End Bay)

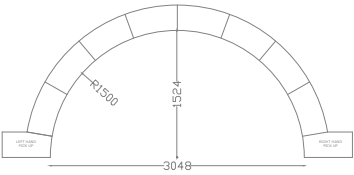


5ft Roman End Bay

*Finished wall to wall measurements

Laying Patterns


600 SERIES MIX PACK

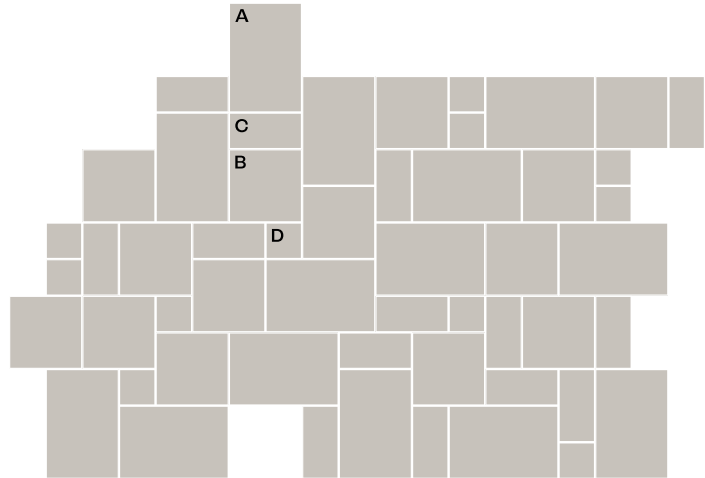

This pack contains our 4 most popular sizes (900 x 600, 600 x 600, 600 x 290 & 290 x 290mm).


The mixed pack is perfectly suitable for all projects whether large or small – always maintaining attractive proportions. The sizes within the packs enable a variety of random patterns.

HERITAGE MIX PACK



To compliment our Danebury Natural Stone Coping, we have developed the Heritage mixed paving pack, which provides an easy to lay, attractive repeating modular pattern in one convenient pack. Each 16.08m² Heritage mixed pack (coverage 16.98m²) has 5 modules per pack.

RANDOM LENGTH PACK

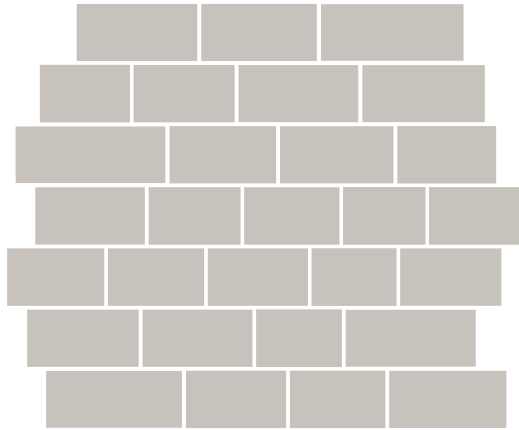

Fixed Width x Random Length paving packs consist of a fixed width of either 560mm or 600mm x random length. Generally, the lengths vary between 300-900mm, these length vary depending on stone type.

Laying Guidelines - External

The following guidance is provided by Cranbourne Stone for general information purposes only.

GENERAL PREPARATION

All porcelain paving should be solid bedded to ensure full support across the entire slab. Spot bedding or dot-and-dab methods should be avoided, as they may lead to staining, reduced performance, or failure. Bedding depths, falls, and construction details may vary depending on application, ground conditions, and load requirements. Installers must always follow current British Standards, manufacturer recommendations, and recognised codes of practice.

CUTTING & LEVELLING

Tiles should be cut using a suitable diamond blade, ideally with water cooling. Tiles should be levelled and may be gently tapped into place using a rubber mallet.

SUBSTRATE PREPARATION & INSTALLATION METHODS

External porcelain paving may be installed using one of the following methods, depending on site conditions and project requirements:

Option 1 - Screed-Based Installation

Where external works continue from internal tiling, a structural concrete screed should be installed in accordance with current standards and formed with appropriate falls for drainage. Tiles may then be fixed using a flexible, exterior-grade thick-bed tile adhesive. Expansion joints should be incorporated in line with current standards and filled with a suitable exterior-grade sealant.

Option 2 - Traditional Slab Installation

For slab-style installations, a well-compacted granular sub-base should be constructed to suit ground conditions and anticipated loads. Falls should be formed to allow effective drainage. Slabs should be laid on a full mortar bed, typically 30–50 mm thick, using a suitable sand and cement mix in accordance with relevant standards.

IMPORTANT NOTE

Cranbourne Stone supplies materials only and accepts no responsibility or liability for the installation, laying, or workmanship of any paving products. All installation works must be carried out by a qualified and competent installer, and responsibility for correct preparation, installation, and compliance with all relevant standards rests solely with the installer and/or contractor.

Laying Guidelines - Internal

(Including Underfloor Heating)

The following guidance is provided by Cranbourne Stone for general information purposes only.

All tiles must be installed on a sound, flat, and stable substrate using a full adhesive bed; spot fixing or dot-and-dab methods should not be used. Substrate preparation, adhesive selection, bed depths, and joint widths will vary depending on site conditions, and installers must always follow current British Standards, manufacturer instructions, and recognised codes of practice.

Tiles should be cut using a suitable diamond blade, ideally water-cooled. Thin tiles should be levelled by hand, with thicker tiles adjusted using a rubber mallet if required.

Tiles may be installed onto a fully cured concrete screed using a flexible, cement-based adhesive, or onto timber or boarded floors where a suitable tile backer board or uncoupling membrane has been correctly installed. Movement joints must be incorporated in accordance with current standards and at changes of plane.

UNDERFLOOR HEATING

Underfloor heating systems must be fully installed, tested, and switched off prior to tiling. These should always be used in conjunction with a decoupling membrane when tiling over UFH, to prevent tiles cracking. A flexible adhesive and grout should also be used when installing. Heating should be recommissioned gradually after installation in accordance with the systems manufactures guidance.


IMPORTANT NOTE

Cranbourne Stone supplies materials only and accepts no responsibility or liability for installation or workmanship. All tiling must be carried out by a qualified and competent installer, who is responsible for correct preparation, installation, and compliance with all relevant standards.


Laying Guidelines

continued...


Coping installation for tiled or liner pool

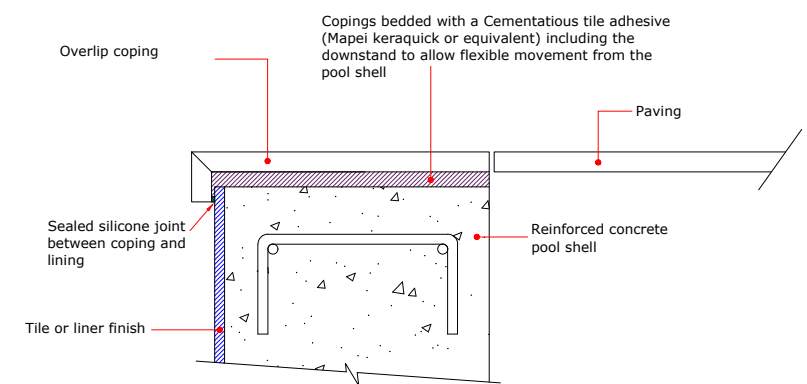


Coping installation for a fibreglass one peice pool

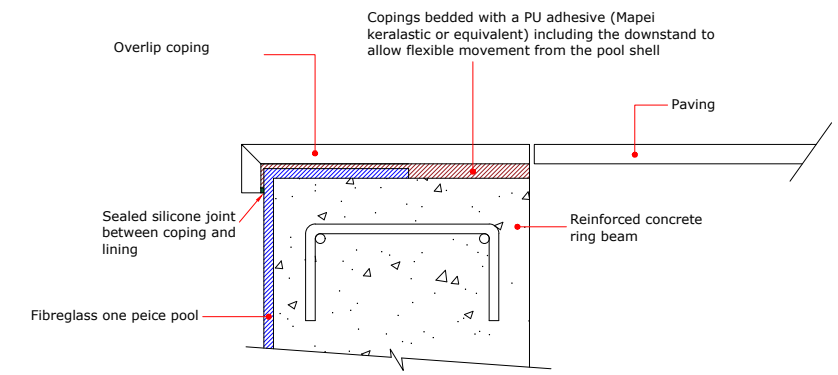

Option 1: Fossil pearl 20mm paving for external application

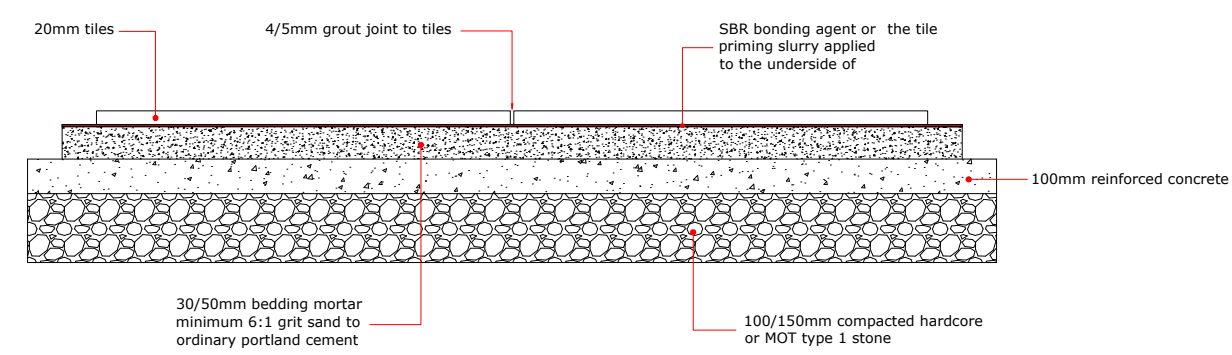

Option 2: Fossil pearl 20mm paving for external application

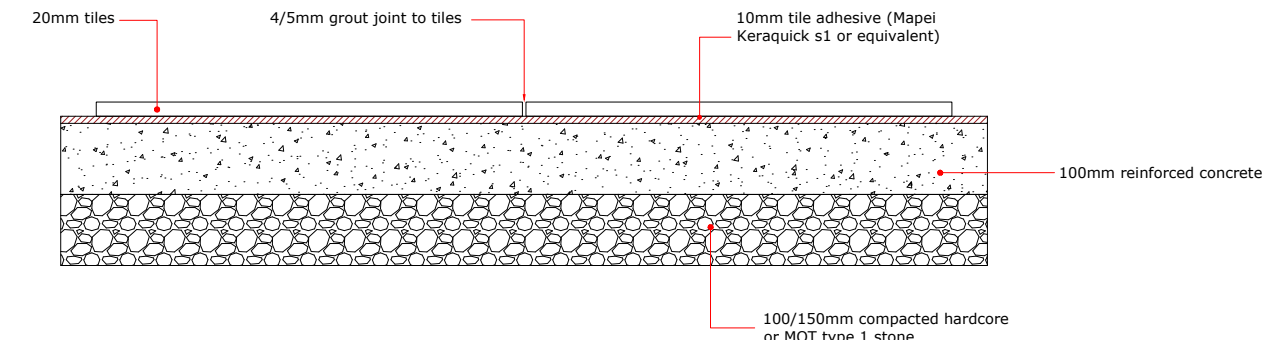

Cleaning & Maintenance

STEP 1 CONDITIONING CLEAN BEFORE SEALING AND PROTECTING



- Intensive Cleaner**
A high performance intensive cleaner for stripping and cleaning of Natural Stone – Sandstone, Limestone, Marble, Travertine, Granite.
- Non hazardous

• High performance

• Deep cleaning

• Low odour

• Easy to use

• Fast acting

• Walls & floors

• Interior & exterior use

APPLICATION	1 LITRE	5 LITRE
Surface Cleaning	60m² per bottle	300m² per bottle
Deep Stripping	30m² per bottle	150m² per bottle
In Extreme Cases	15m² per bottle	75m² per bottle

STEP 2 PROTECTING THE STONE AFTER CLEANING



- Ultimate Water-based Sealer**
A natural finish water based impregnating sealer. Minimal change to surface character. Helps protect against staining. The treated surfaces strongly repel water, oil and grease. This product allows surfaces to breathe. Ideal for protecting porous surfaces that do not have a damp proof course. This product is non film forming.
- Non hazardous

• High performance

• Low odour VOC free

• Invisible protection

• Easy to apply

• Interior & exterior use

• Long lasting protection

APPLICATION	1 LITRE	5 LITRE
Low porosity surfaces	15m² per bottle	75m² per bottle
High porosity surfaces	7.5m² per bottle	37.5m² per bottle
Polished surfaces	30m² per bottle	150m² per bottle

STEP 3 AFTERCARE - DAILY/WEEKLY/MONTHLY CLEANING



- General Cleaner**
A gentle PH Neutral cleaner especially formulated for regular cleaning of Natural Stone. Cleans without damaging the grout on tile. Leaves surfaces with a fresh clean fragrance
- Streak free

• Non-rinse formula

• Fast drying

• No sticky residue

• Low foaming

• PH neutral

APPLICATION	1 LITRE	5 LITRE
40m² surface	20 washes approx	100 washes approx



Working in partnership with Mapei, we supply a full range of Mapei fixing products specifically selected for the installation of our natural stone and porcelain materials.

This collaboration ensures that every installation benefits from compatible materials, proven systems, and shared technical expertise, delivering long-lasting performance, durability, and compliance with best practice.

A TRUSTED PARTNERSHIP
& 10-YEAR MAPEI WARRANTY

Through our partnership with **Mapei**, you can benefit from a **10-year Mapei warranty** when your project is:

- Assessed by a **Mapei technical representative** in collaboration with Cranborne Stone
- Installed in full accordance with the **approved Mapei specification and system**

Following the approved specification gives you added peace of mind that your installation meets the highest technical standards.

JOINT PROJECT REGISTRATION
& TECHNICAL SUPPORT

If you would like to register a project with us, **Cranborne Stone and Mapei work together** to provide joined-up technical support. A **Mapei representative can attend site** to:

- Assess the project requirements
- Specify the correct **fixing materials and installation system**
- Provide a **full written specification** required to obtain the 10-year warranty

This service ensures that every element of the installation is technically correct from the outset.

WHY DESIGNERS & CONTRACTORS
CHOOSE CRANBOURNE STONE & MAPEI

Technical Assurance

A coordinated approach between Cranborne Stone and Mapei, including on-site assessment and system specification by a Mapei technical representative.

Reduced Risk

Materials and fixing systems are specified together, reducing incompatibility issues and helping protect the finished installation.

10-Year Warranty Protection

Projects installed to the approved joint specification can qualify for a Mapei-backed 10-year warranty, giving confidence to designers, contractors, and clients alike.

Trusted Industry Partnership

Cranborne Stone's premium materials, supported by Mapei's globally trusted fixing systems, provide a complete and dependable installation solution.

GROUT

Ultra Colour Plus

The following colours are stocked, other colours can be ordered in.



- 123 Ancient White
- 103 Moon White
- 118 Biscuit
- 132 Beige
- 114 Anthracite
- 113 Cement Grey
- 112 Medium Grey

ADHESIVE FOR EXTERNAL APPLICATION

Keraquick S1

Can be used with either natural stone or porcelain.



EPOXY GROUT

Kerapoxy Easy Design

We also advise the **Kerapoxy Cleaner** to go with this for residue. Can be ordered in all colours.



ADHESIVE FOR INTERNAL APPLICATION

Keraquick S1 or Keraflex Maxi

Can be used with either natural stone or porcelain and over underfloor heating.



REGISTER YOUR PROJECT

To start your **10-year warranty programme**, simply scan the QR code to register your project.

Once registered, a Mapei representative will be arranged to support your project and provide the required specification.



Register today and install with confidence using Mapei-approved systems

continued...



Our Mapei product recommendations, continued...

ADHESIVE FOR POOL TANK TILES

Adesilex P10
For mosaics

Keraquick S1 or Keraflex Maxi
For large format tiles



DECOUPLING MEMBRANES

Mapeguard UM35 and WP200 (for tanking)



TANKING MEMBRANE FOR INTERNAL POOL TANK

Mapelastc Zero, Mapeband Easy
& Mapnet 150 System



GENERAL SLURRY

Eporip Resin
For internal pools

Plaincrete
For external pools



SILICONE

Mapesil LM
For natural stone

Mapesil AC
For porcelain

Primer Seal M
For inside joints



